

THINK TECH FORWARD

Stock code: 300415

Designed by YIZUMI, June 2025

YIZUMI

Medical Injection Molding Machine



Yizumi International Business Co., Ltd.
Address: No.22-2 Ke Yuan 3rd Road, Shunde, Foshan, Guangdong 528300, China
TEL: 400-802-6888(China) 86-757-2921 9001(Overseas)
Email: imm@yizumi.com www.yizumi.com

[DISCLAIMER]
[1] YIZUMI reserves the right to modify the product description in the catalogue. Specification might be changed without prior notice.
[2] The picture in the catalogue is for reference only. The real object should be considered as final.
[3] The data in the catalogue is obtained from internal testing in YIZUMI laboratory.
Please refer to the actual machine for the final data. YIZUMI reserves the right of final interpretation upon disputes and ambiguities.



THINK TECH FORWARD


Medical Injection Molding Machine

PRODUCT DETAILS

PRODUCT DETAILS

The medical industry focuses on people's lives and health. We are well aware of the significant responsibility. YIZUMI medical line department, rooted in the medical industry, can provide sophisticated injection molding solutions and service of different products that are covering production consultation, research and development, and scale production. YIZUMI is your reliable partner!

There are many types of medical products, ranging from commonly used therapeutic products, diagnostic products, hemodialysis products to pharmaceutical packaging products, etc. Different products have different raw materials, structures and quality requirements. According to the process characteristics of these products, combined with the requirement of cleanroom production, YIZUMI creatively launched a series of injection molding machines dedicated to the medical industry, including hydraulic machine, electric machine, hydraulic high-speed machine, electric high-speed machine, to achieve the production of high efficiency, high quality, high stability, and high cleanliness.

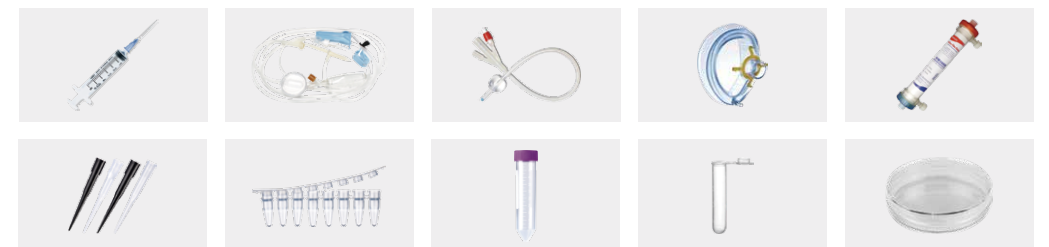

Hydraulic Medical Injection Molding Machine

Value Propositions

- ↑ Higher efficiency
- 🌿 Higher cleanliness
- 🛡️ Suitable for low-cost cleanroom production




※ The data above were acquired by testing in the factory, only for your reference.

Technical Highlights


Higher efficiency

- **Improved injection speed:** With new upgraded power, injection speed can reach up to 120-130mm/s, which is improved by 15%-25%. So the requirements of commonly used medical consumables can be met.
- **Enhanced plasticizing efficiency:** For raw materials commonly used in medical consumables like PP and PS, high-plasticizing and high-mixing screw is used to improve plasticizing efficiency, with plasticizing efficiency enhanced by over 20%.
- **Improved dry cycle:** The machine's dry cycle time is reduced by over 20%, significantly improving production efficiency.

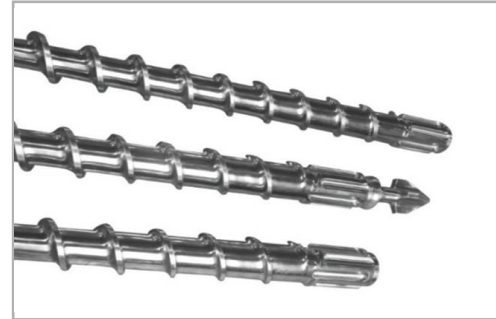


Higher cleanliness

- **Stable and clean Tie-Bar Free technology:** No contact between the platen and the tie bars, and no lubricating oil on the tie bars, prevents product contamination and thus improves pass rate. With this technology solving traditional machine issue of lubrication oil buildup on steel belts, frequent cleaning is no longer required. Furthermore, it reduces mechanical friction during mold opening/-closing for lower energy consumption loss.
- White machine outlook, scratch resistant spray coating.
- Enclosed design for machine and its exposed parts reduce dust accumulation, clean and tidy.
- The machine frame, product dropping area, periphery of platen are covered with stainless steel plates, which is clean and easy to clean.

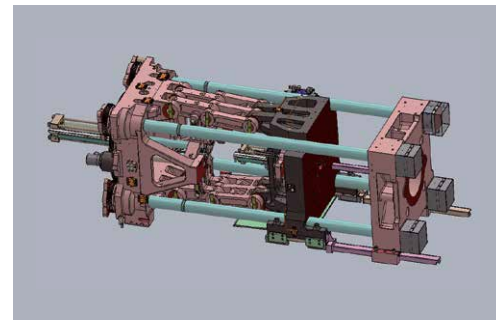

Suitable for low-cost cleanroom production

- Small footprint to save cleanroom space.
- All-new servo system and oil circuit design for low energy consumption.
- Improving efficiency while reducing costs to enable low-cost production for customers

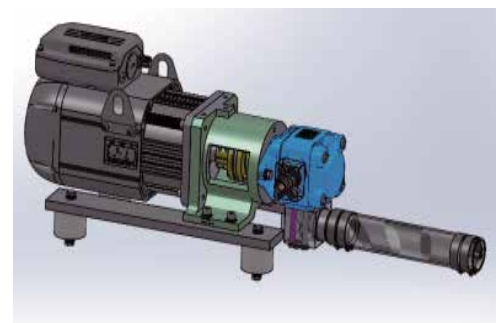

Application Cases



Syringe barrel (5ml)

Weight: 2.3g
 Number of cavities: 48
 Runner type: Semi hot runner
 Cycle time: 14±1s
 IMM model: T260M



Respiratory mask

Weight: 14.5g
 Number of cavities: 4
 Runner type: Semi hot runner
 Cycle time: 26±1s
 IMM model: T260M







Rigid needle hub

Weight: 0.357g
 Number of cavities: 40
 Runner type: Semi hot runner
 Cycle time: 16±1s
 IMM model: T200M

Electric Medical Injection Molding Machine

Value Propositions

-  Stability and precision
-  High efficiency and energy saving
-  Intelligence and automation
-  High cleanliness



※ The data above were acquired by testing in the factory, only for your reference.

High Efficiency and Energy Saving


Electrical System

- ▶ Simple and powerful electrical system, suitable for high-performance solutions of electric injection molding machines.
- ▶ 15 inch HD color touch screen, with clear and concise images.
- ▶ Standard with PDP process quality control and SPC process quality statistics function, automatic quality sorting function.
- ▶ Oscilloscope with the function of chart display, and curve recording of process data changes.
- ▶ Real-time remote operation and control through network (Optional).
- ▶ Flexible I/O expansion modules integrate more functions as needed, and are freely programmable for advanced hardware and software systems to make scanning cycle of 1ms available, meeting the requirement of "Industry 4.0"(Optional).
- ▶ 16-level user access management to protect data security.




Unique SDC servo direct control technology

- ▶ The process algorithm built into the servo driver is independently developed by YIZUMI.
- ▶ Control cycle was reduced from 2-4ms to 0.125ms.
- ▶ Injection position, mold opening and closing position, switching position and control position accuracy are more accurate.

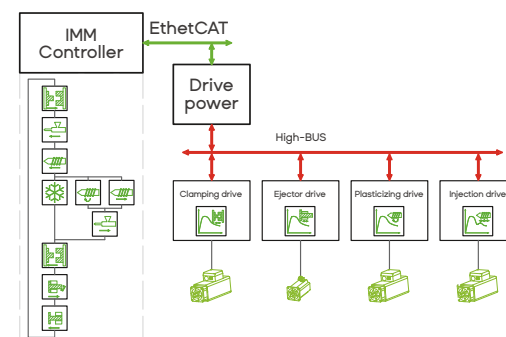

Fast injection speed, fast acceleration, only need 25ms to accelerate to 350mm/s

- ▶ Easily meeting the molding requirement of products with complex structure and high standards of precision.
- ▶ Standard with fast injection speed for diversified molding requirements.

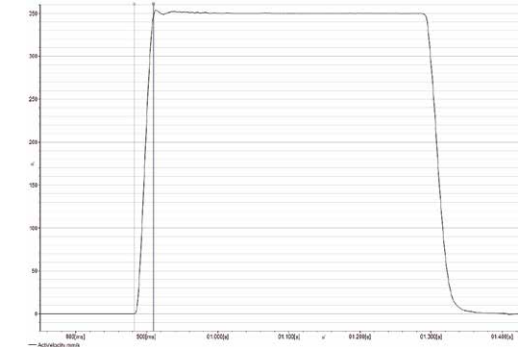

All-electric configuration


- ▶ Reduce the risk of oil contamination to products.
- ▶ Ensure high accuracy of all machine movements, including ejection.
- ▶ Completely free of hydraulic oil, minimizing the risk of contamination in the cleanroom.



Intelligence and Automation


Smart clamping force management system (Optional)

- ▶ Smart clamping force setting, maintaining, optimizing, and monitoring.
- ▶ Automatically find the optimal clamping force, improve the service life of molds and machines, and reduce maintenance costs.
- ▶ Reduce machine energy consumption.
- ▶ Improve product quality and reduce quality problems such as flash and trapped gas.
- ▶ Ensure the stable clamping force for stable production.

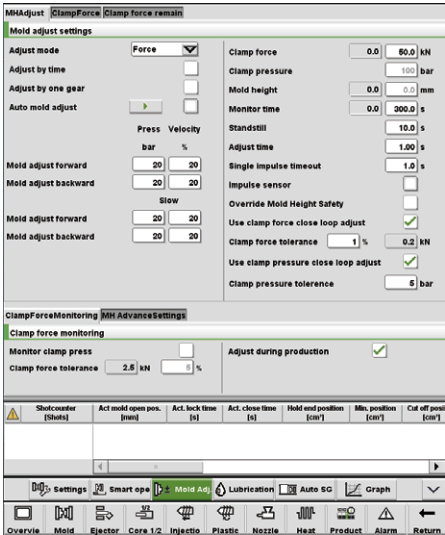

Intelligent weight control

- ▶ Automatic monitoring and real-time dynamic adjustment of molding process parameters.
- ▶ Effectively reduce the impact of external factors on the molding process, such as mold temperature, raw material properties, etc., and improve the stability of the process.
- ▶ Effectively reduce product weight differences and improve consistency.

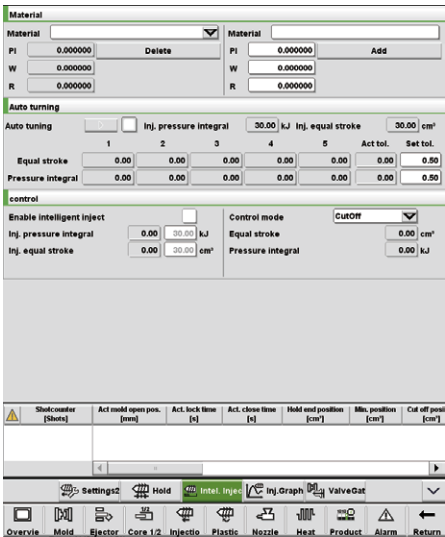

Application Cases



Pre-filled flush syringe

Material: PP
Number of cavities: 32
Cycle time: 12±1s
IMM model: FF240M




Syringe needle cap

Material: PP
Number of cavities: 128
Runner type: Full hot runner
Cycle time: 8±1s
IMM model: FF200M



Drip chamber

Material: PVC
Number of cavities: 24
Cycle time: 28±1 s
IMM model: FF300M

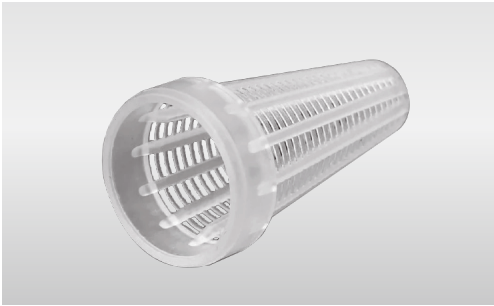

Dialysis filter

Material: PP
Number of cavities: 16
Runner type: Full hot runner
Cycle time: 10s
IMM model: FF160M

Hydraulic High-Speed Medical Injection Molding Machine

Value Propositions



High rigidity



High injection speed



Small footprint



Suitable for cleanroom production



※ The data above were acquired by testing in the factory, only for your reference.

Highlights

High-strength toggle

- ▶ Enhance the strength and rigidity of the toggle, to extend the machine service life and improve the operation stability of machine under high speed and high strength.
- ▶ Large beveled toggles reduce platen deformation and effectively ensures product quality.



High-rigidity clamping unit

- ▶ Suitable for large length-diameter ratio or deep cavity product, it can significantly improve the clamping force and better protect the mold.



Single-cylinder injection system

- ▶ The maximum injection speed is up to 500mm/s (Optional).
- ▶ It can be equipped with an electric injection unit to improve the injection accuracy and speed, and achieve parallel plasticizing (Optional).
- ▶ Equipped with screw of large length-diameter ratio to improve plasticizing efficiency.



Compact structural design

- ▶ Small footprint and space saving. The P250M machine occupies an area of 5.76m×1.73m×2.28m.



Application Cases



Blood collection tube

Material: PET
 Number of cavities: 64
 Runner type: Full hot runner
 Cycle time: 8±1s
 IMM model: P250M



Centrifuge tube

Material: PP
 Number of cavities: 64
 Runner type: Full hot runner
 Cycle time: 8±1s
 IMM model: P250M



Petri dish

Material: PS
 Number of cavities: 8
 Runner type: Full hot runner
 Cycle time: 6±1s
 IMM model: P250M

Clean Configuration

Injection molding machines special for medical industry have configuration with high levels of cleanliness to meet the requirement of clean-room production, and have a number of unique designs to help achieve pollution-free clean-room production, with increased productivity and less energy consumption.

- ▶ White machine outlook, scratch resistant spray coating.
- ▶ Over 100mm gap between the machine bottom and ground, easy to clean.
- ▶ Machine height is specially designed for cleanroom of height limit.
- ▶ Enclosed machine foot, easy to clean.



Aerogel insulation device reduces heat loss and machine energy consumption. Additionally, it contributes to reduced cleanroom energy consumption by reducing heat dissipation to the cleanroom environment.




- ▶ Smooth and clean platen
- ▶ No T-slot on platen
- ▶ Nickel plating platen (Optional)



- ▶ Stainless steel hopper is used to ensure product cleanliness, easy to clean.



- ▶ Enclosed structure of machine exposed parts, clean and tidy.

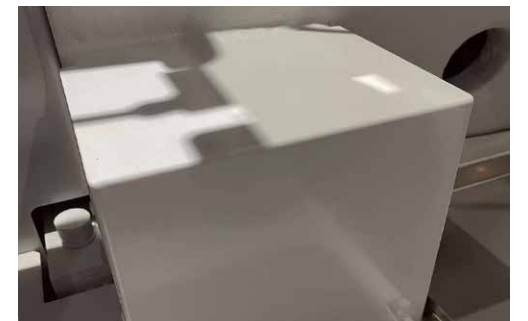

- ▶ The periphery of the platen is covered with stainless steel plates, clean and easy to tidy.
- ▶ The machine door adopts stainless steel guide rails, with the height of the upper guide rail same as that of the upper tie bar, which is clean and convenient to use the robot.



- ▶ The lower part of the product dropping area is covered with stainless steel plates, which is clean and wear-resistant.



Clean Configuration (Optional)

Infrared heater band for plasticizing unit (Optional)

- ▶ The surface temperature of the infrared heater band is ≤ 60 degrees, which can effectively reduce energy consumption in the cleanroom.
- ▶ Reduce heat dissipation from machine.
- ▶ Reduce the turbulence caused by machine;
- ▶ Better energy-saving effect.



Dust-proof nozzle guard (Optional)

- ▶ One-click to exhaust smoke and dust from nozzle.
- ▶ Reduce dust emission to ensure clean production environment.



One-button automatic tie-bar extraction (Optional)

- ▶ Convenient for the installation of big-size mold.
- ▶ Effectively reduce the height of cleanroom.




Built-in conveyor belt (Optional)

- ▶ The conveyor belt adopts a dust-proof and clean design.
- ▶ The IMM operation system integrates the control of conveyor belt, allowing direct control of conveyor belt movement, speed, etc., through the operation interface of injection molding machine.



Sampling chute (Optional)

- ▶ IMM integrated control, facilitating product sampling.
- ▶ Connected with a controller system, to achieve automatic quality sorting.

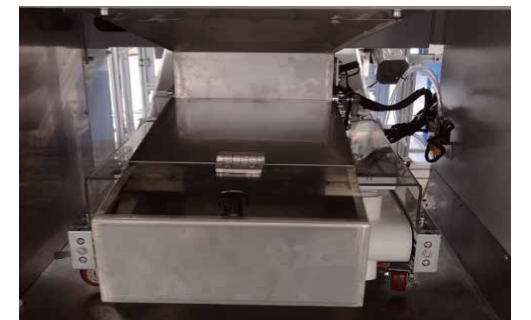

Cooling water manifold base+ manifold flow meter (Optional)

- ▶ Cooling water manifold is sealed and built-in, while the base is placed at the side of the platen, convenient to connect the mold water channel and monitor the situation.




T160-200M Specifications


Descriptions	UNIT	T160M			T200M		
International size		604/1600			895/2000		
		A	B	C	A	B	C
INJECTION UNIT							
Theoretical shot volume	cm³	298	371	452	425	518	664
Shot weight (PP)	g	214	267	325	306	373	478
	oz	7.6	9.4	11.5	10.8	13.2	16.9
Screw diameter	mm	43	48	53	48	53	60
Injection pressure	MPa	203	163	134	211	173	135
Injection rate (PP)	g/s	133.5	166.4	203.0	163.3	199.1	254.0
Screw L:D ratio	/	22.3:1	20:1	20:1	22:1	20:1	20:1
Max. injection speed	mm/s	128	128	128	125	125	125
Screw stroke	mm	205	205	205	235	235	235
Screw speed	r/min	0-250	0-250	0-250	0-250	0-250	0-250
CLAMPING UNIT							
Clamping force	kN	1600			2000		
Space between tie bars (WxH)	mmxmm	460x440			510x510		
Mold thickness (min.-max.)	mm	200-460			220-520		
Opening stroke	mm	410			460		
Max. daylight	mm	870			980		
Ejector force	kN	42			49		
Ejector stroke	mm	140			150		
Number of ejector pin holes	-	5			5		
POWER UNIT							
Max. system pressure	MPa	17.5			17.5		
Motor power	kW	29.3			35.2		
Heating power	kW	10.9	12.1		13.06	15.36	
Number of temperature control zones	-	4			5		
GENERAL							
Dry cycle time	s	2.1			2.7		
Oil tank capacity	L	167			230		
Machine dimensions (LxWxH)	m	5.37×1.23×2.07			6.06×1.34×2.16		
Machine weight	kg	4100			5000		

Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

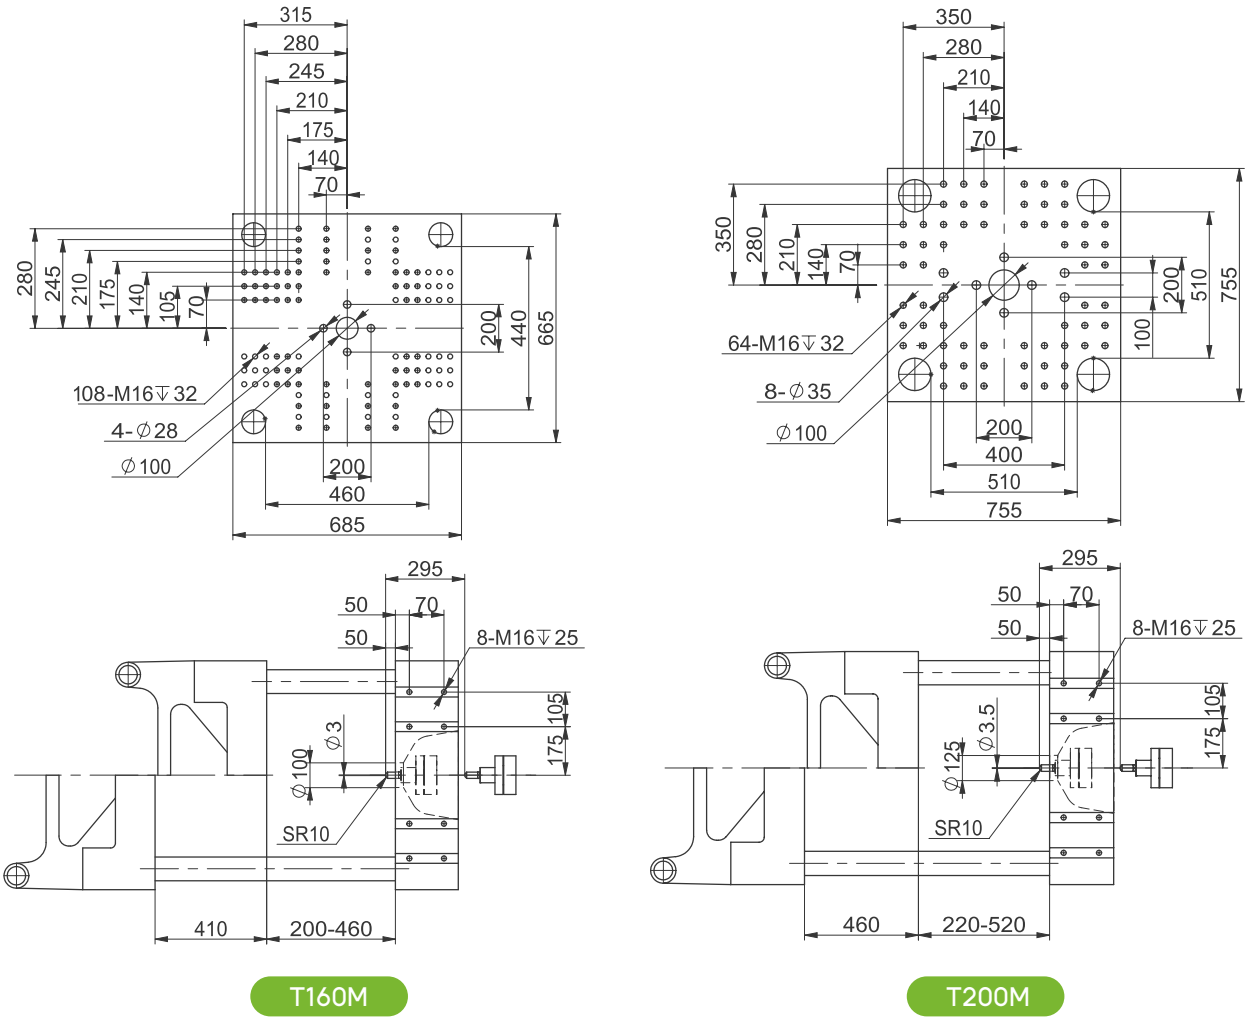

Machine Dimensions

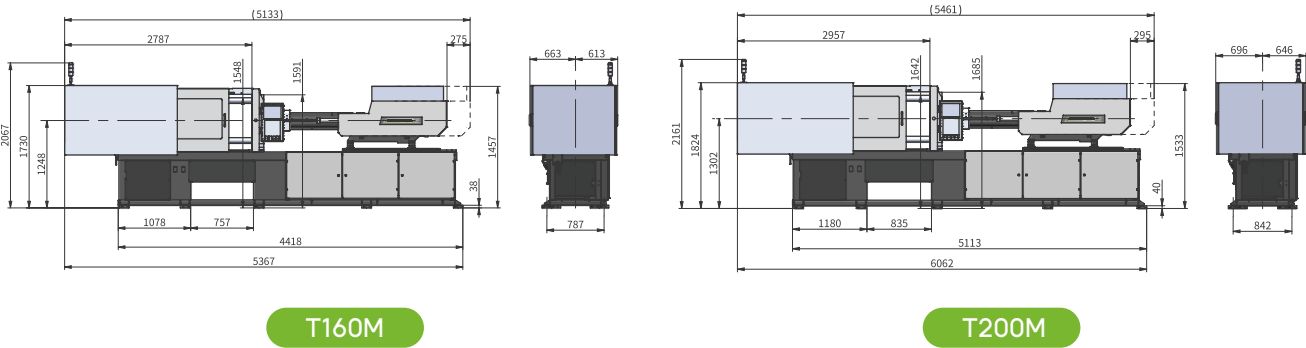


T260-320M Specifications


Descriptions	UNIT	T260M			T320M		
International size		1010/2600			1810/3200		
		A	B	C	A	B	C
INJECTION UNIT							
Theoretical shot volume	cm³	479	584	749	834	978	1135
Shot weight (PP)	g	345	421	539	600	704	817
	oz	12.2	14.8	19.0	21.2	24.8	28.8
Screw diameter	mm	48	53	60	60	65	70
Injection pressure	MPa	211	173	135	217	185	160
Injection rate (PP)	g/s	163.3	199.1	255.2	247.8	290.8	337.9
Screw L:D ratio	/	22:1	20:1	20:1	22.6:1	20.9:1	19.4:1
Max. injection speed	mm/s	125	125	125	122	122	122
Screw stroke	mm	265	265	265	295	295	295
Screw speed	r/min	0-210	0-210	0-210	0-210	0-210	0-210
CLAMPING UNIT							
Clamping force	kN	2600			3200		
Space between tie bars (WxH)	mmxmm	570x570			670x670		
Mold thickness (min.-max.)	mm	240-570			260-660		
Opening stroke	mm	530			580		
Max. daylight	mm	1100			1240		
Ejector force	kN	77			77		
Ejector stroke	mm	160			170		
Number of ejector pin holes	-	13			13		
POWER UNIT							
Max. system pressure	MPa	17.5			17.5		
Motor power	kW	35.2			58.6		
Heating power	kW	13.06		15.36	22.9		
Number of temperature control zones	-	5			5		
GENERAL							
Dry cycle time	s	2.8			3.4		
Oil tank capacity	L	230			326		
Machine dimensions (LxWxH)	m	6.16×1.53×2.25			6.78×1.66×2.41		
Machine weight	kg	6700			8800		

Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

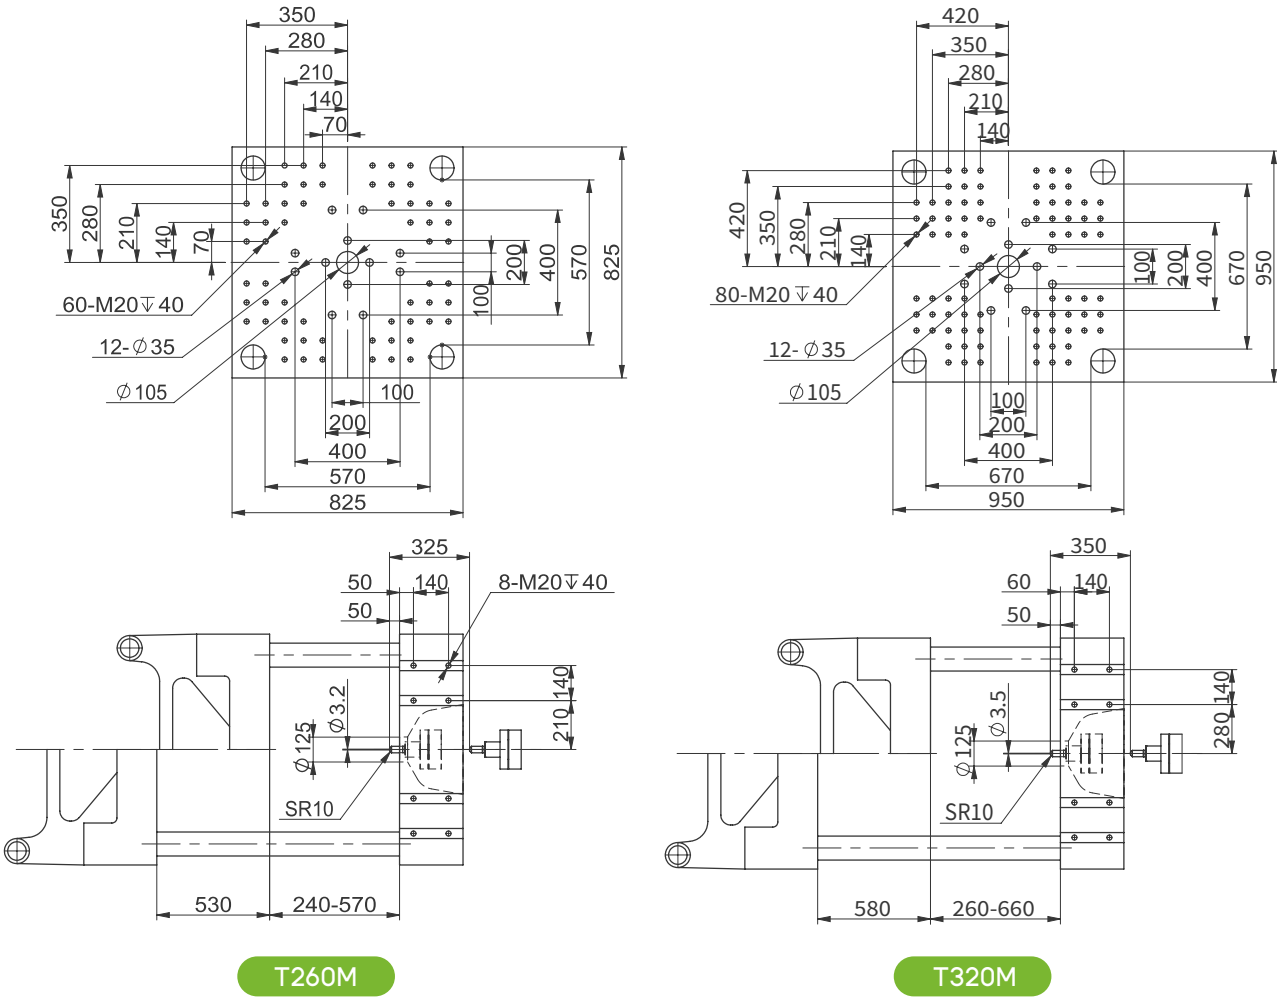

Machine Dimensions

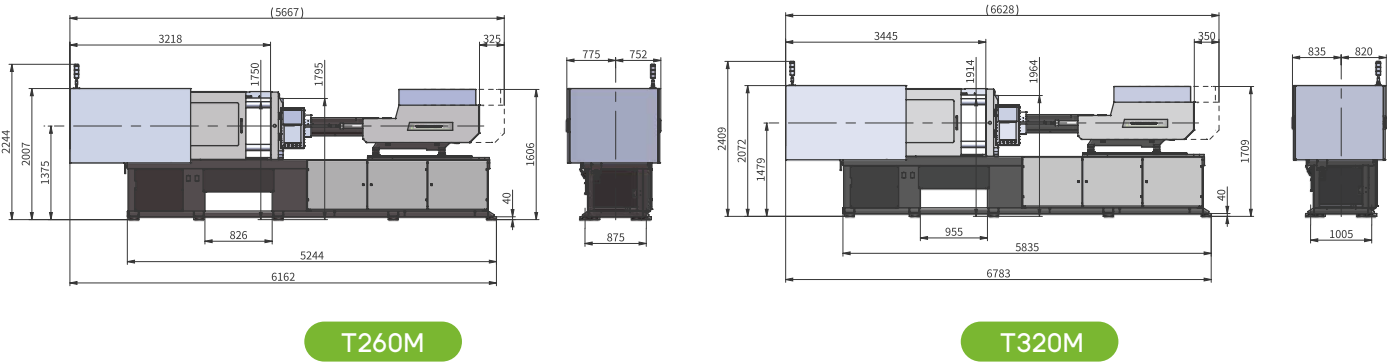


FF160M Specifications


Descriptions		IU320f		IU430f		IU670f	
International size		317		427		668	
		A	B	A	B	A	B
INJECTION UNIT							
Screw diameter	mm	30	35	35	40	40	48
Screw L:D ratio	-	24:1	20:1	24:1	20:1	22.3:1	20:1
Screw stroke	mm	165		170		205	
Theoretical shot volume	cm³	117	159	164	214	258	371
Shot weight (PP)	g	84	114	118	154	185	267
Injection pressure	MPa	272	200	261	200	259	180
Holding pressure	MPa	218	160	209	160	207	144
Injection speed	mm/s	350		350		350	
Injection rate	cm³/s	247	337	377	440	440	633
Screw speed	rpm	400		400		350	
Nozzle contact force	kN	30		40		40	
Heating power	kW	7.3		8.9		10.6	10.9
Total power	kW	52.4		56.9		61	
Total current	A	88.4		96		103	
CLAMPING UNIT							
Clamping force	kN	1600					
Opening stroke	mm	430					
Space between tie bars (WxH)	mm	530×530					
Mold thickness (min.-max.)	mm	195-520					
Ejector force	kN	125					
Ejector stroke	mm	40					
Number of ejector pin holes	-	5					
GENERAL							
Machine dimensions (LxWxH)	m	4.96x1.52x2.2		5.08x1.52x2.2		5.41x1.52x2.2	
Machine weight	kg	5850		6300		6380	

- Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

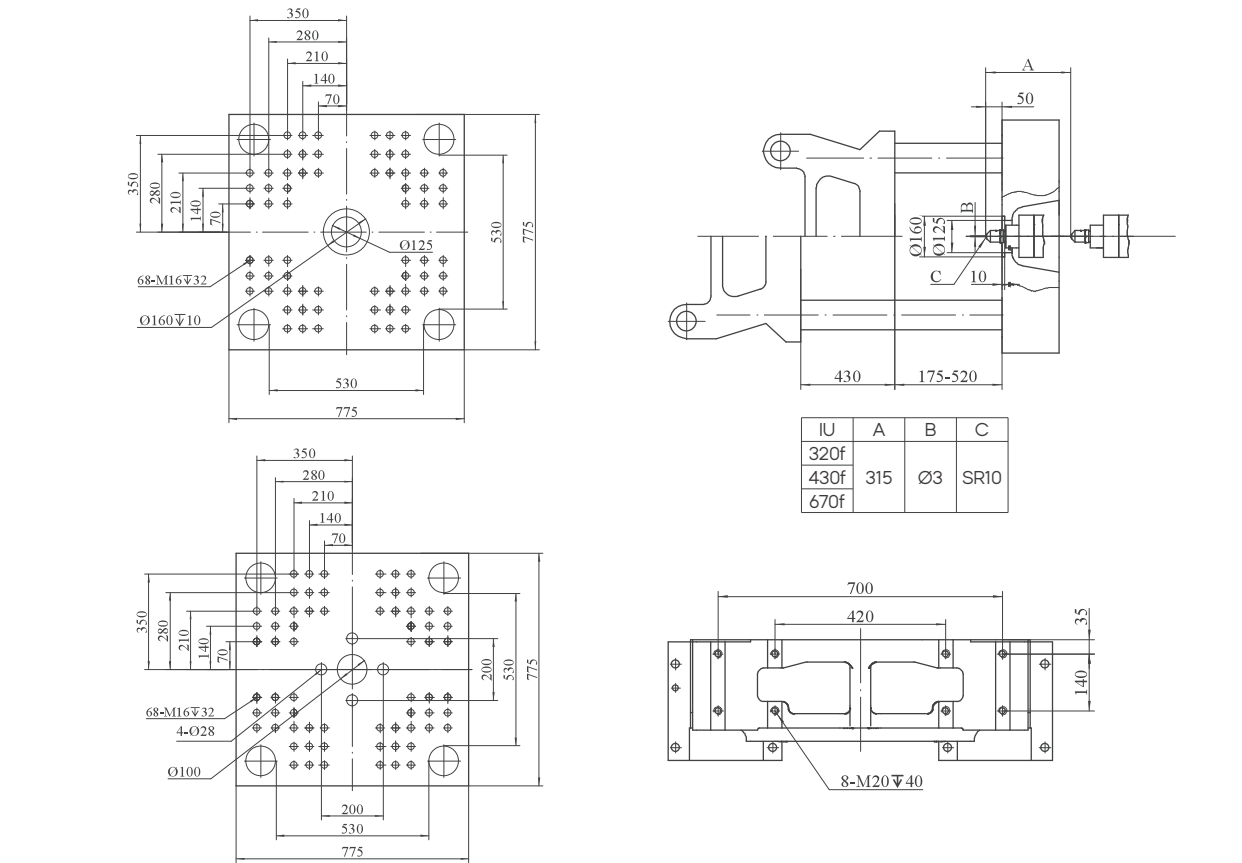

Machine Dimensions

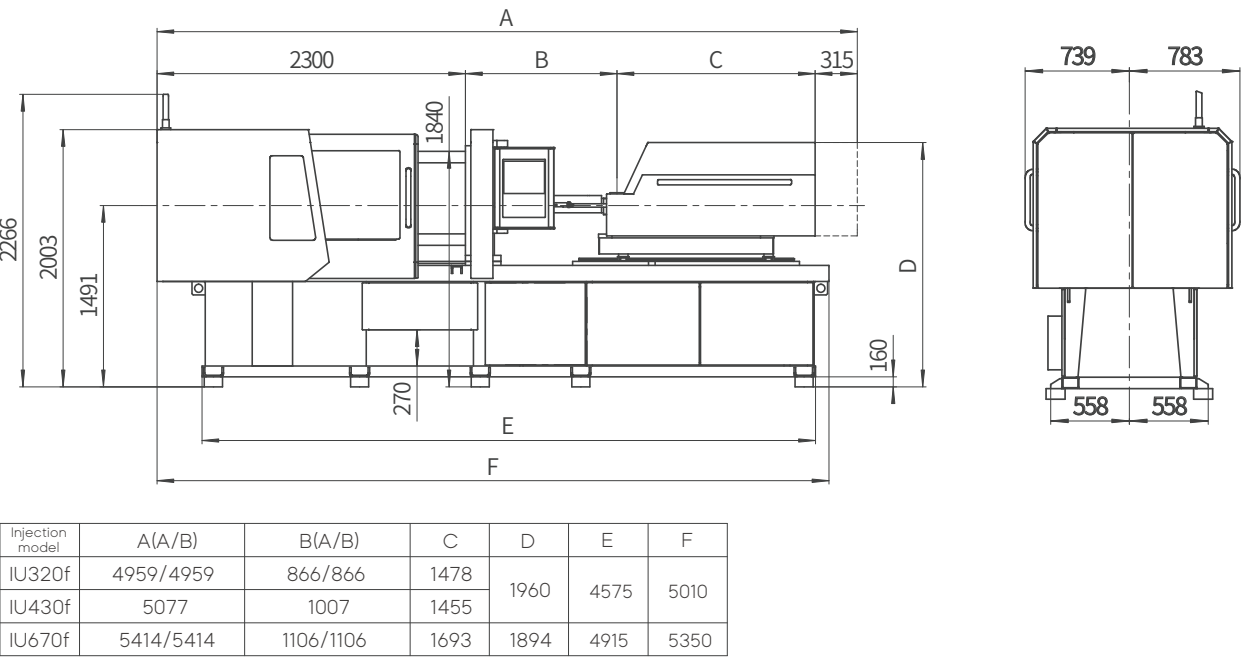


FF200M Specifications


Descriptions		IU430f		IU670f		IU930f	
International size		427		668		933	
		A	B	A	B	A	B
INJECTION UNIT							
Screw diameter	mm	35	40	40	48	48	53
Screw L:D ratio	-	24:1	20:1	22.3:1	20:1	22:1	20:1
Screw stroke	mm	170		205		235	
Theoretical shot volume	cm³	164	214	258	371	425	518
Shot weight (PP)	g	118	154	185	267	306	373
Injection pressure	MPa	261	200	259	180	219	180
Holding pressure	MPa	209	160	207	144	176	144
Injection speed	mm/s	350		350		350	
Injection rate	cm³/s	337	440	440	633	633	772
Screw speed	rpm	400		350		320	
Nozzle contact force	kN	40		40		60	
Heating power	kW	8.9		10.6	10.9	13.6	
Total power	kW	56.9		61		111.9	
Total current	A	96		103		188.9	
CLAMPING UNIT							
Clamping force	kN	2000					
Opening stroke	mm	480					
Space between tie bars (WxH)	mm	580x580					
Mold thickness (min.-max.)	mm	220-560					
Ejector force	kN	40					
Ejector stroke	mm	125					
Number of ejector pin holes	-	9					
GENERAL							
Machine dimensions (LxWxH)	m	5.55x1.54x2.24		5.66x1.54x2.24		5.95x1.54x2.24	
Machine weight	kg	6730		6810		7450	

Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

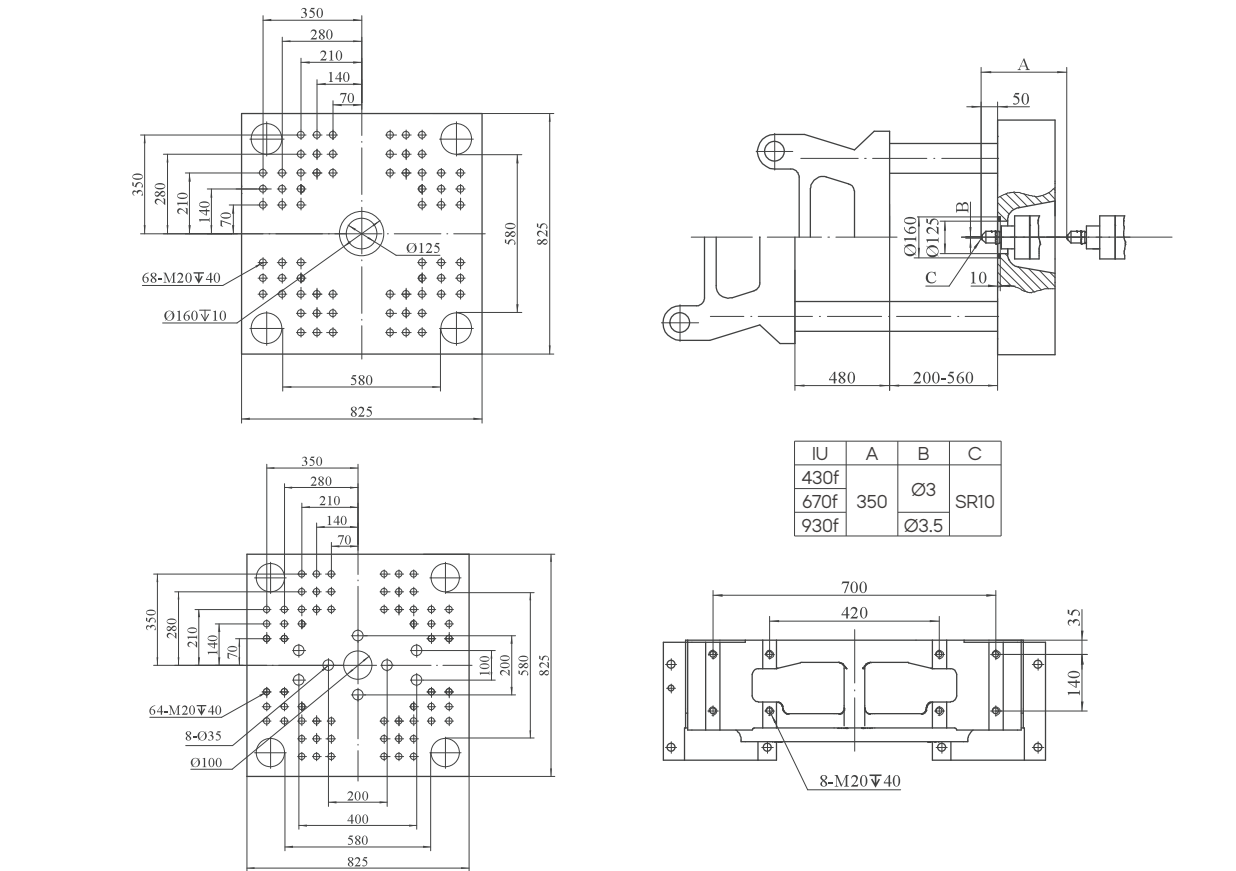

Machine Dimensions

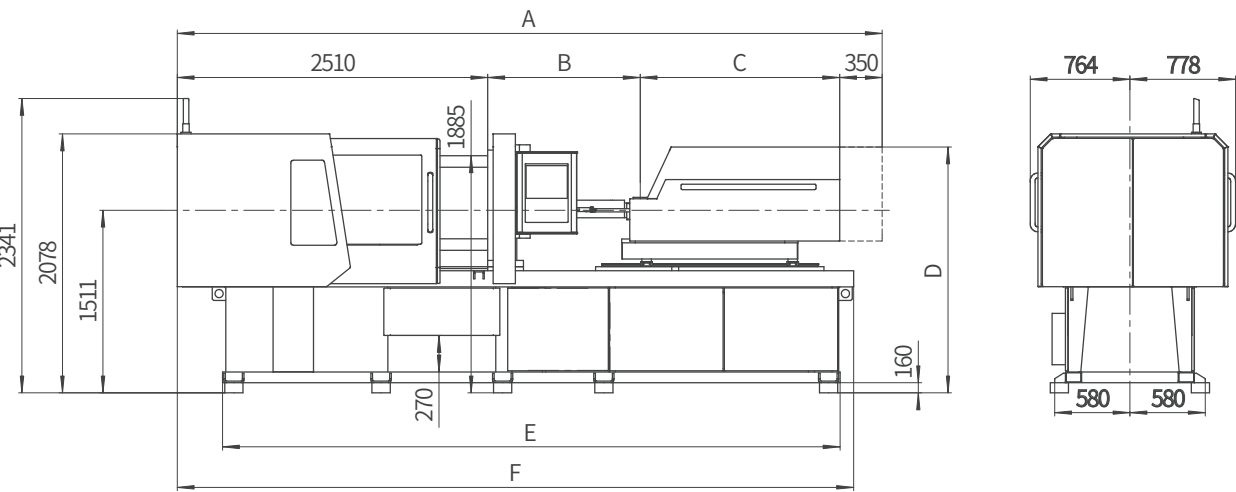


Injection model	A(A/B)	B(A/B)	C	D	E	F
IU430f	5322	1007	1455	1907	5115	5550
IU670f	5659/5659	1106/1106	1693	1977		
IU930f	5949/5949	1219/1219	1870	2092	5415	5850

FF240M Specifications


Descriptions		IU670f		IU930f		IU1350f	
International size		668		933		1349	
		A	B	A	B	A	B
INJECTION UNIT							
Screw diameter	mm	40	48	48	53	53	60
Screw L:D ratio	-	22.3:1	20:1	22:1	20:1	22.6:1	20:1
Screw stroke	mm	205		235		265	
Theoretical shot volume	cm³	258	371	425	518	585	749
Shot weight (PP)	g	185	267	306	373	421	539
Injection pressure	MPa	259	180	219	180	231	180
Holding pressure	MPa	207	144	176	144	185	144
Injection speed	mm/s	350		350		250	
Injection rate	cm³/s	440	633	633	772	552	707
Screw speed	rpm	350		320		300	
Nozzle contact force	kN	40		60		60	
Heating power	kW	10.6	10.9	13.6		16.4	
Total power	kW	61		111.9		119.7	
Total current	A	103		188.9		202	
CLAMPING UNIT							
Clamping force	kN	2400					
Opening stroke	mm	530					
Space between tie bars (WxH)	mm	630x630					
Mold thickness (min.-max.)	mm	220-600					
Ejector force	kN	55.6					
Ejector stroke	mm	150					
Number of ejector pin holes	-	13					
GENERAL							
Machine dimensions (LxWxH)	m	6.17x1.67x2.23		6.27x1.67x2.23		6.82x1.67x2.23	
Machine weight	kg	9200		9840		10950	

- Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

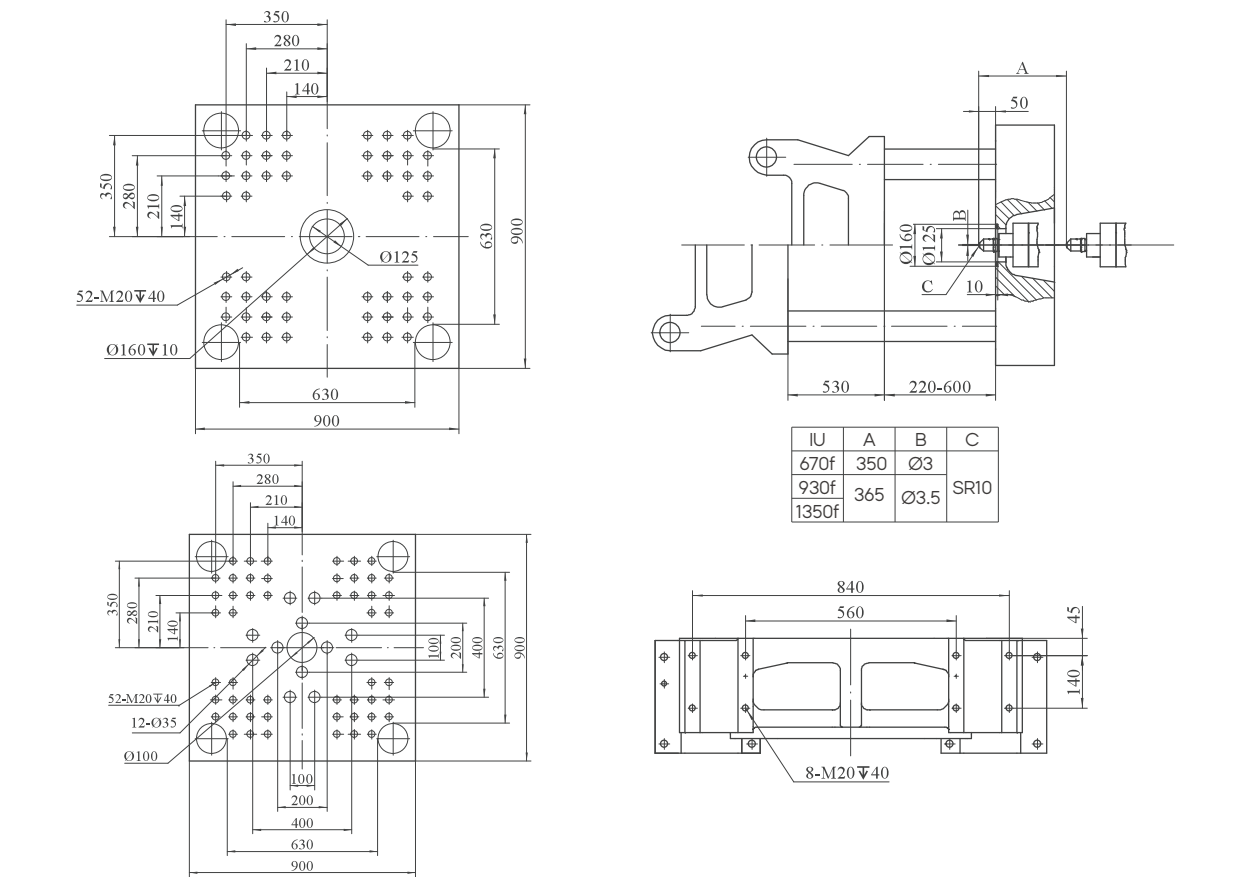

Machine Dimensions

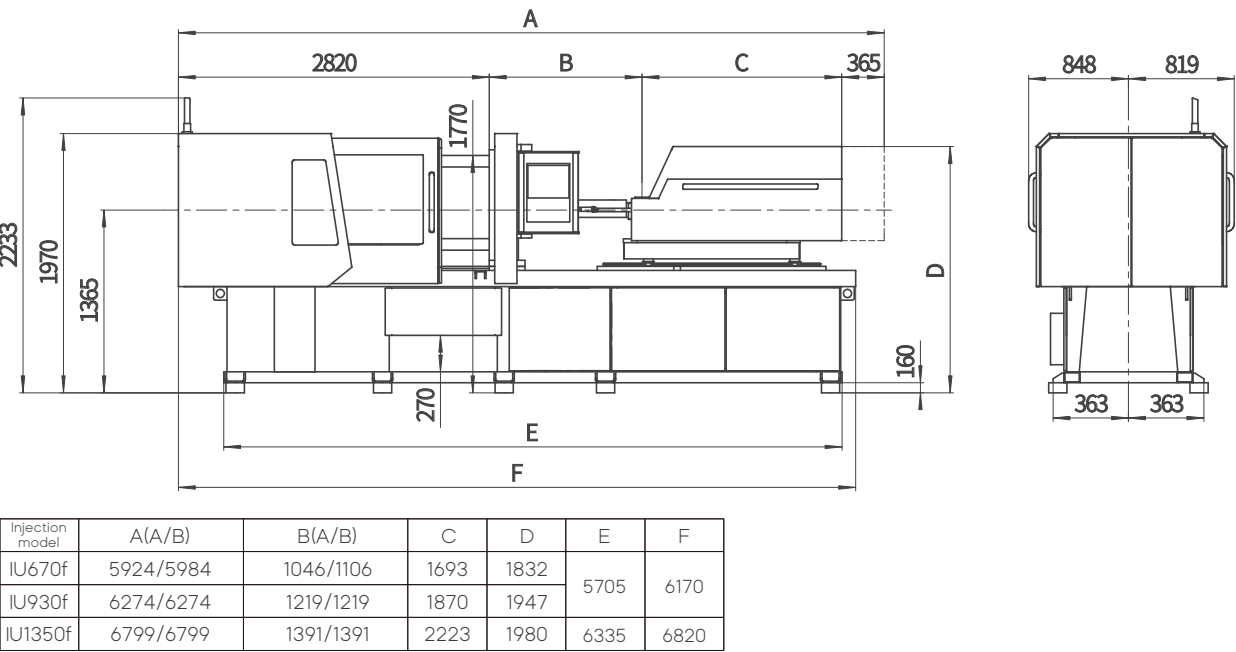


FF300M Specifications


Descriptions		IU930f		IU1350f		IU1930f	
International size		933		1349		1928	
		A	B	A	B	A	B
INJECTION UNIT							
Screw diameter	mm	48	53	53	60	60	68
Screw L:D ratio	-	22:1	20:1	22.6:1	20:1	22.6:1	20:1
Screw stroke	mm	235		265		295	
Theoretical shot volume	cm³	425	518	585	749	834	1071
Shot weight (PP)	g	306	373	421	539	601	771
Injection pressure	MPa	219	180	231	180	231	180
Holding pressure	MPa	176	144	185	144	185	144
Injection speed	mm/s	350		250		250	
Injection rate	cm³/s	633	772	552	707	707	908
Screw speed	rpm	320		300		250	
Nozzle contact force	kN	60		60		60	
Heating power	kW	13.6		16.4		22.2	
Total power	kW	111.9		119.7		136.8	
Total current	A	188.9		202		231	
CLAMPING UNIT							
Clamping force	kN	3000					
Opening stroke	mm	610					
Space between tie bars (WxH)	mm	720x720					
Mold thickness (min.-max.)	mm	250-650					
Ejector force	kN	55.6					
Ejector stroke	mm	150					
Number of ejector pin holes	-	13					
GENERAL							
Machine dimensions (LxWxH)	m	7.01x1.79x2.35		7.09x1.79x2.35		7.34x1.79x2.35	
Machine weight	kg	11370		12480		12900	

Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

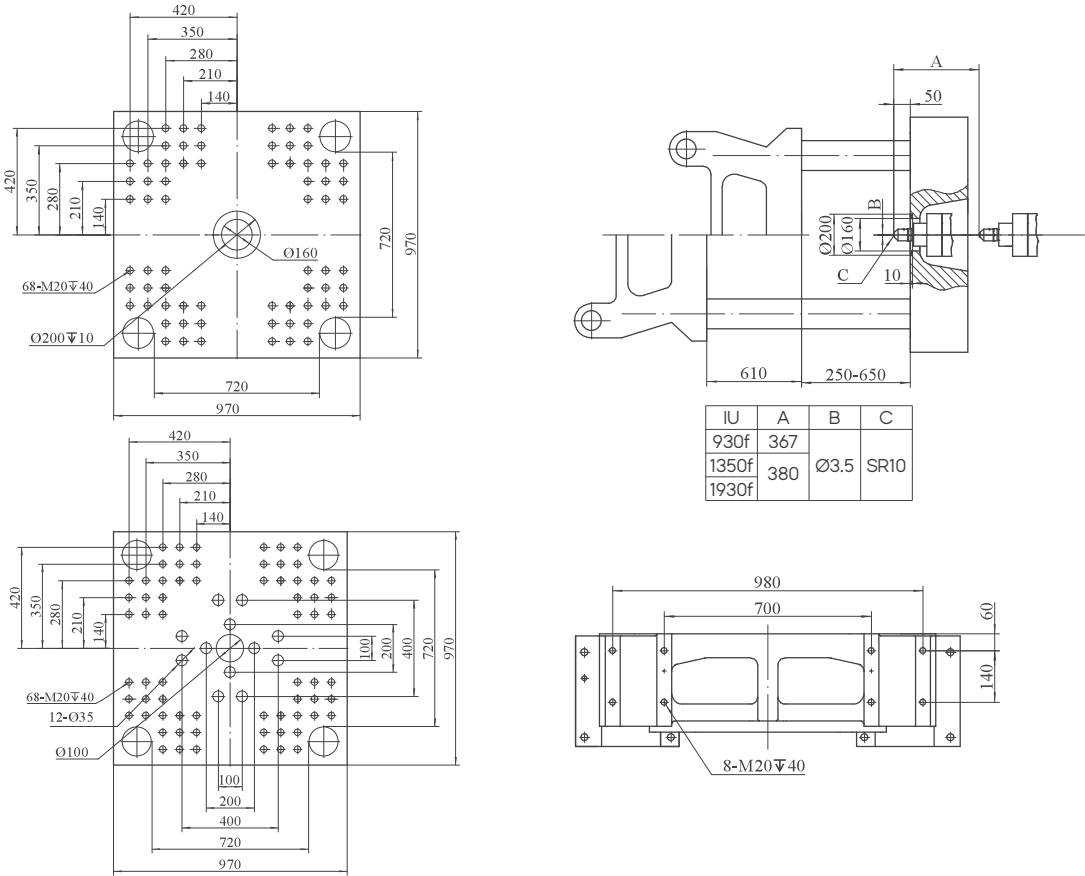

Machine Dimensions

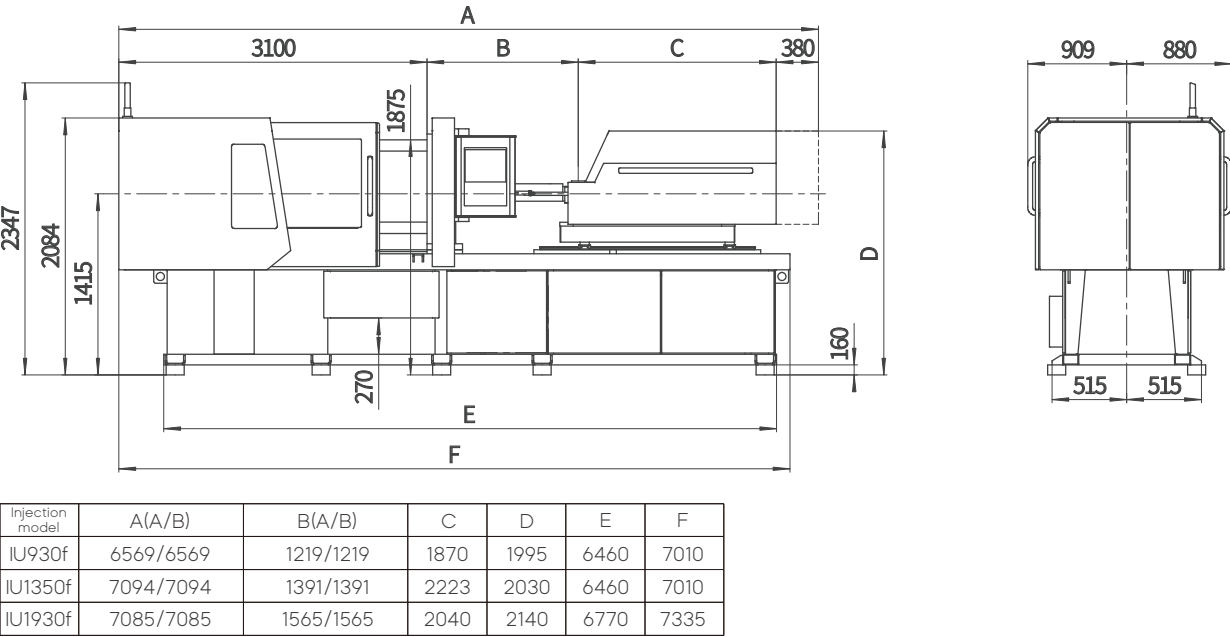


FF380M Specifications


Descriptions		IU1350f		IU1930f		IU2700f	
International size		1349		1928		2695	
		A	B	A	B	A	B
INJECTION UNIT							
Screw diameter	mm	53	60	60	68	68	76
Screw L:D ratio	-	22.6:1	20:1	22.6:1	20:1	22.3:1	20:1
Screw stroke	mm	265		295		330	
Theoretical shot volume	cm³	585	749	834	1071	1198	1497
Shot weight (PP)	g	421	539	601	771	863	1078
Injection pressure	MPa	231	180	231	180	225	180
Holding pressure	MPa	185	144	185	144	180	144
Injection speed	mm/s	250		250		200	
Injection rate	cm³/s	552	707	707	908	726	907
Screw speed	rpm	300		250		200	
Nozzle contact force	kN	60		60		100	
Heating power	kW	16.4		22.2		26.3	
Total power	kW	119.7		136.8		162.3	
Total current	A	202		231		274	
CLAMPING UNIT							
Clamping force	kN	3800					
Opening stroke	mm	710					
Space between tie bars (WxH)	mm	820×820					
Mold thickness (min.-max.)	mm	290-720					
Ejector force	kN	99					
Ejector stroke	mm	200					
Number of ejector pin holes	-	13					
GENERAL							
Machine dimensions (LxWxH)	m	8.17x1.95x2.49		8.17x1.95x2.49		8.17x1.95x2.49	
Machine weight	kg	16880		17300		18690	

- Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

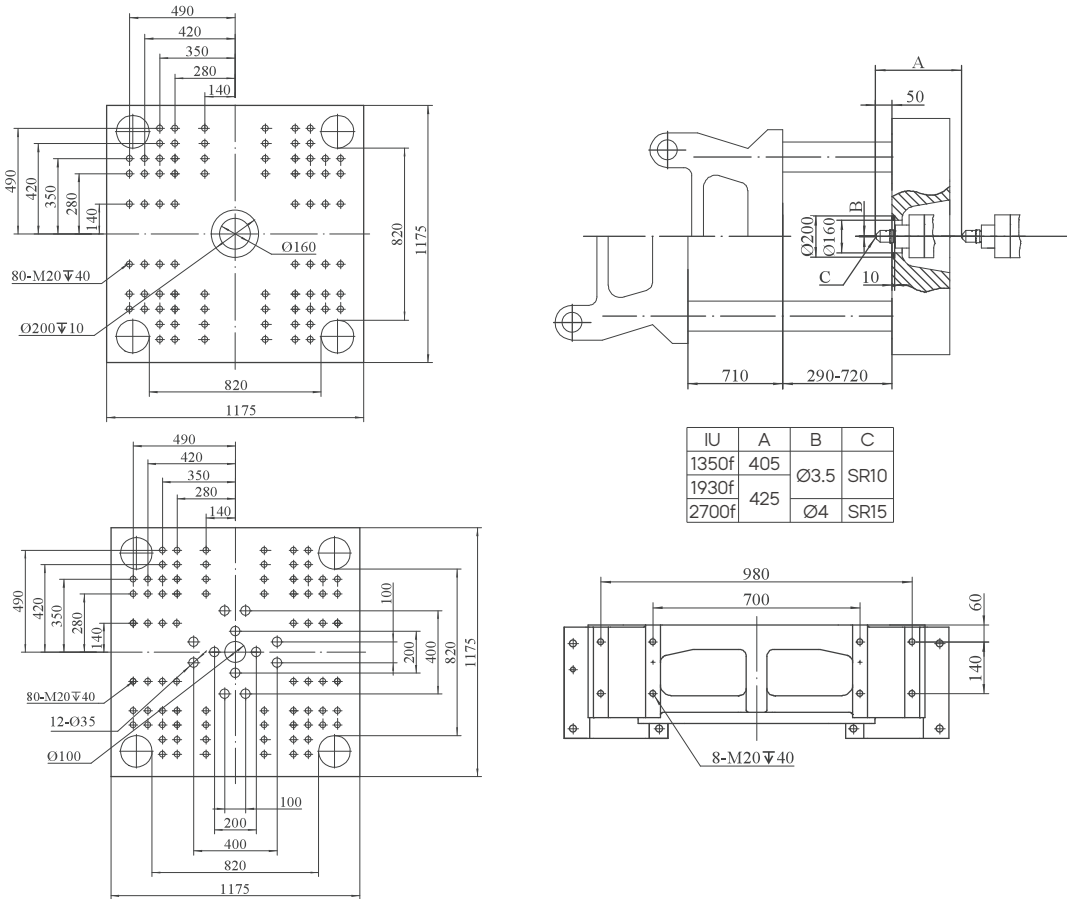

Machine Dimensions

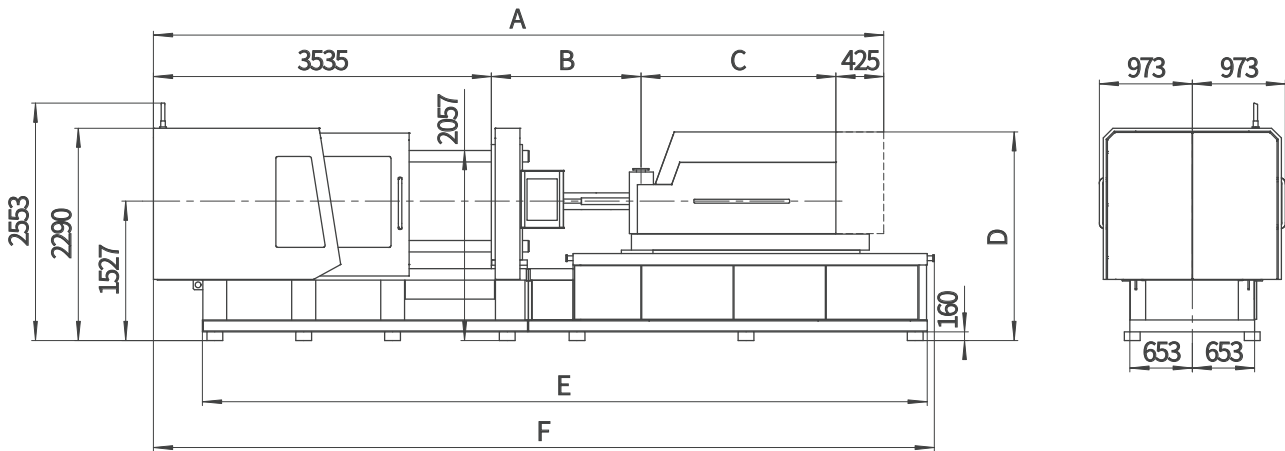


P300M Specifications


Descriptions		P300M	
International size		1480/3000	
INJECTION UNIT			
Screw diameter	mm	60	65
Screw L:D ratio	-	20:1	
Screw stroke	mm	270	
Theoretical shot volume	cm³	763	895
Shot weight (PP)	g	549	644
	oz	19.4	22.7
Injection pressure	MPa	194	166
Injection speed	mm/s	239	
Screw speed	r/min	0-300	
CLAMPING UNIT			
Clamping force	kN	3000	
Opening stroke	mm	610	
Space between tie bars (WxH)	mmxmm	680×635	
Mold thickness (min.-max.)	mm	300-650	
Max. daylight	mm	1260	
Ejector force	kN	137	
Ejector stroke	mm	180	
Number of ejector pin holes	-	13	
POWER UNIT			
Max. system pressure	MPa	17.5	
Motor power	kW	55+45	
Heating power	kW	23	30
Number of temperature control zones	-	5	
GENERAL			
Oil tank capacity	l	730	
Machine dimensions (LxWxH)	m	6.43x1.83x2.35	
Machine weight	kg	12600	

Note: 1. Theoretical shot volume= barrel sectional area * injection stroke
2. Shot weight=shot volume * 0.72 (for PP)
3. Due to improvement, specifications may be changed without prior notice.
4. Please let us know if you have engineering-plastics products (PVC, PC or PMMA etc.) or any special requirement.

Platen Dimensions

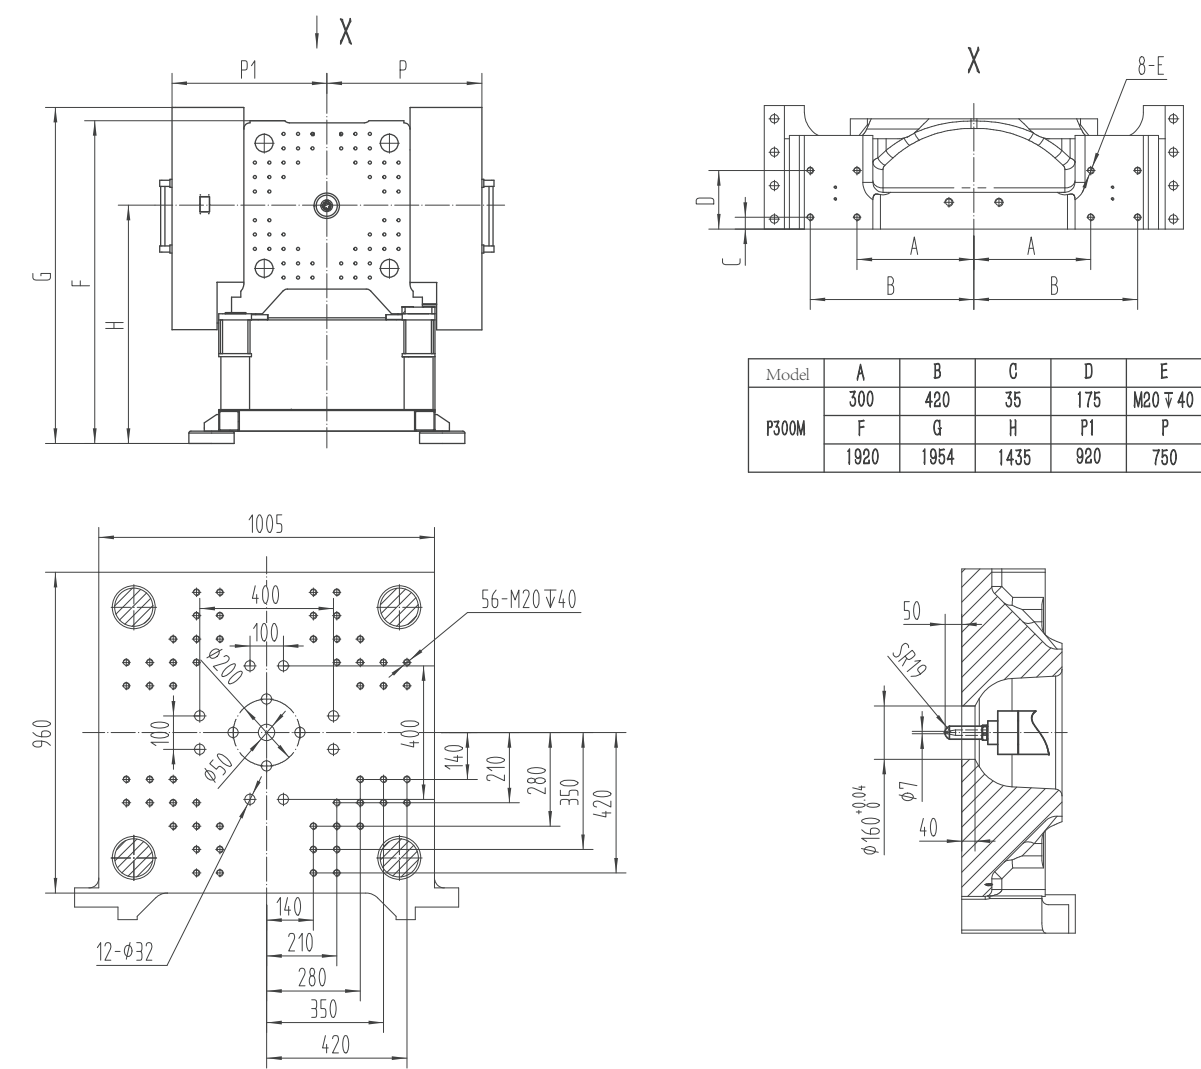

Machine Dimensions

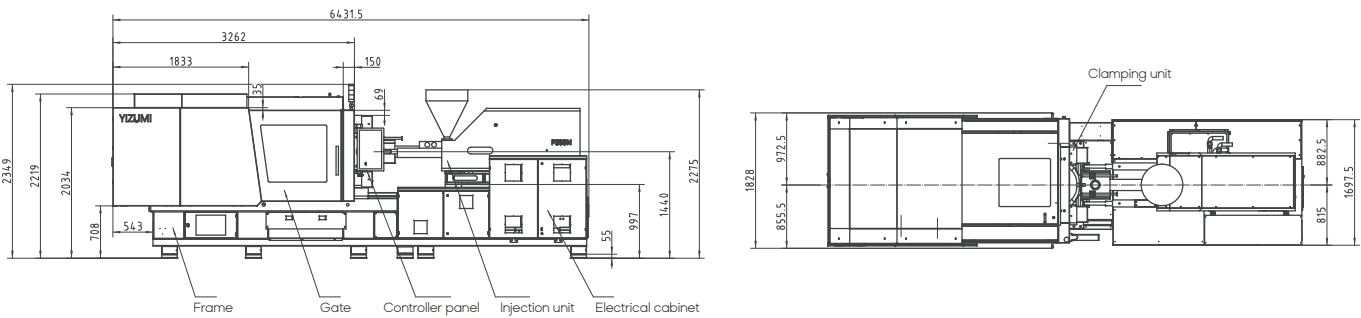

YZUWU

THINK
TECH FORWARD